



LEGEND

	IRRIGATION CANAL		ROAD
	PV SUPPORT		MESH FENCE
	AREA BOUNDARY		GATE
	ENTRANCE		WEATHER STATION
	GUARD HOUSE		LIGHTNING PROTECTION ROD
	TRANSFORMER		

LAND USE STATISTICS

NO.	ITEM	UNIT	AMOUNT	REMARK
1	TOTAL LAND AREA	M ²	1,253,652	
2	ROAD	KM	3.8	
3	FENCE	KM	10.1	
4	ENTRANCE (4M WIDTH MESH GATE)	SET	3	
5	GUARD HOUSE	SET	1	

SYSTEM INFORMATION

Moudle Mounting Structure Type		2×14 Fixed Tilt (South Facing)	
System Voltage		DC 1400V, LV-AC 800V, MV 33kV	
Inter Row Clearance		1.5m	
Tilt Angle	Azimuth Angel	7°	0°
Modules in Series per Strings		28	
Strings per Inverter		21	
Total No. of Inverters (350kW)		286	
Total No. of PV modules (710Wp)		168,168 (286 x 21 x 28)	
Plant DC Power		119.39 MW	
Plant AC Power		100.10 MW	
DC/AC Ratio		1.19	

EXPLANATION:
1. THE PROJECT ADOPTS 710Wp PV MODULES, INCLUDING 6006 PV STRINGS AND COMPOSED OF 29 UNITS, TOTAL CAPACITY OF 119.39 MWdc;
2. THE INCLINATION ANGLE OF PV PANELS IN THE PROJECT IS 7° ;
3. THE FENCE、PV MODULES AND ROAD OF THE PV FARM ARE 10 METERS AWAY FROM THE STREAM AND 15 METERS AWAY FROM THE IRRIGATION CANAL.




100 MW UTILITY SCALE PROJECT

CLIENT :

DRAFT BY :	M.MUNSIF
CHECKED BY :	
APPROVED BY:	
FINALIZED BY:	

DRAWING TITLE : GD–Panel Layout
DRAWING NO : GD–PL–001
SITE ID :
SITE NO :

SCALE :		DATE :	
SN	DATE	MODIFICATION CONTENT	APPROVED BY

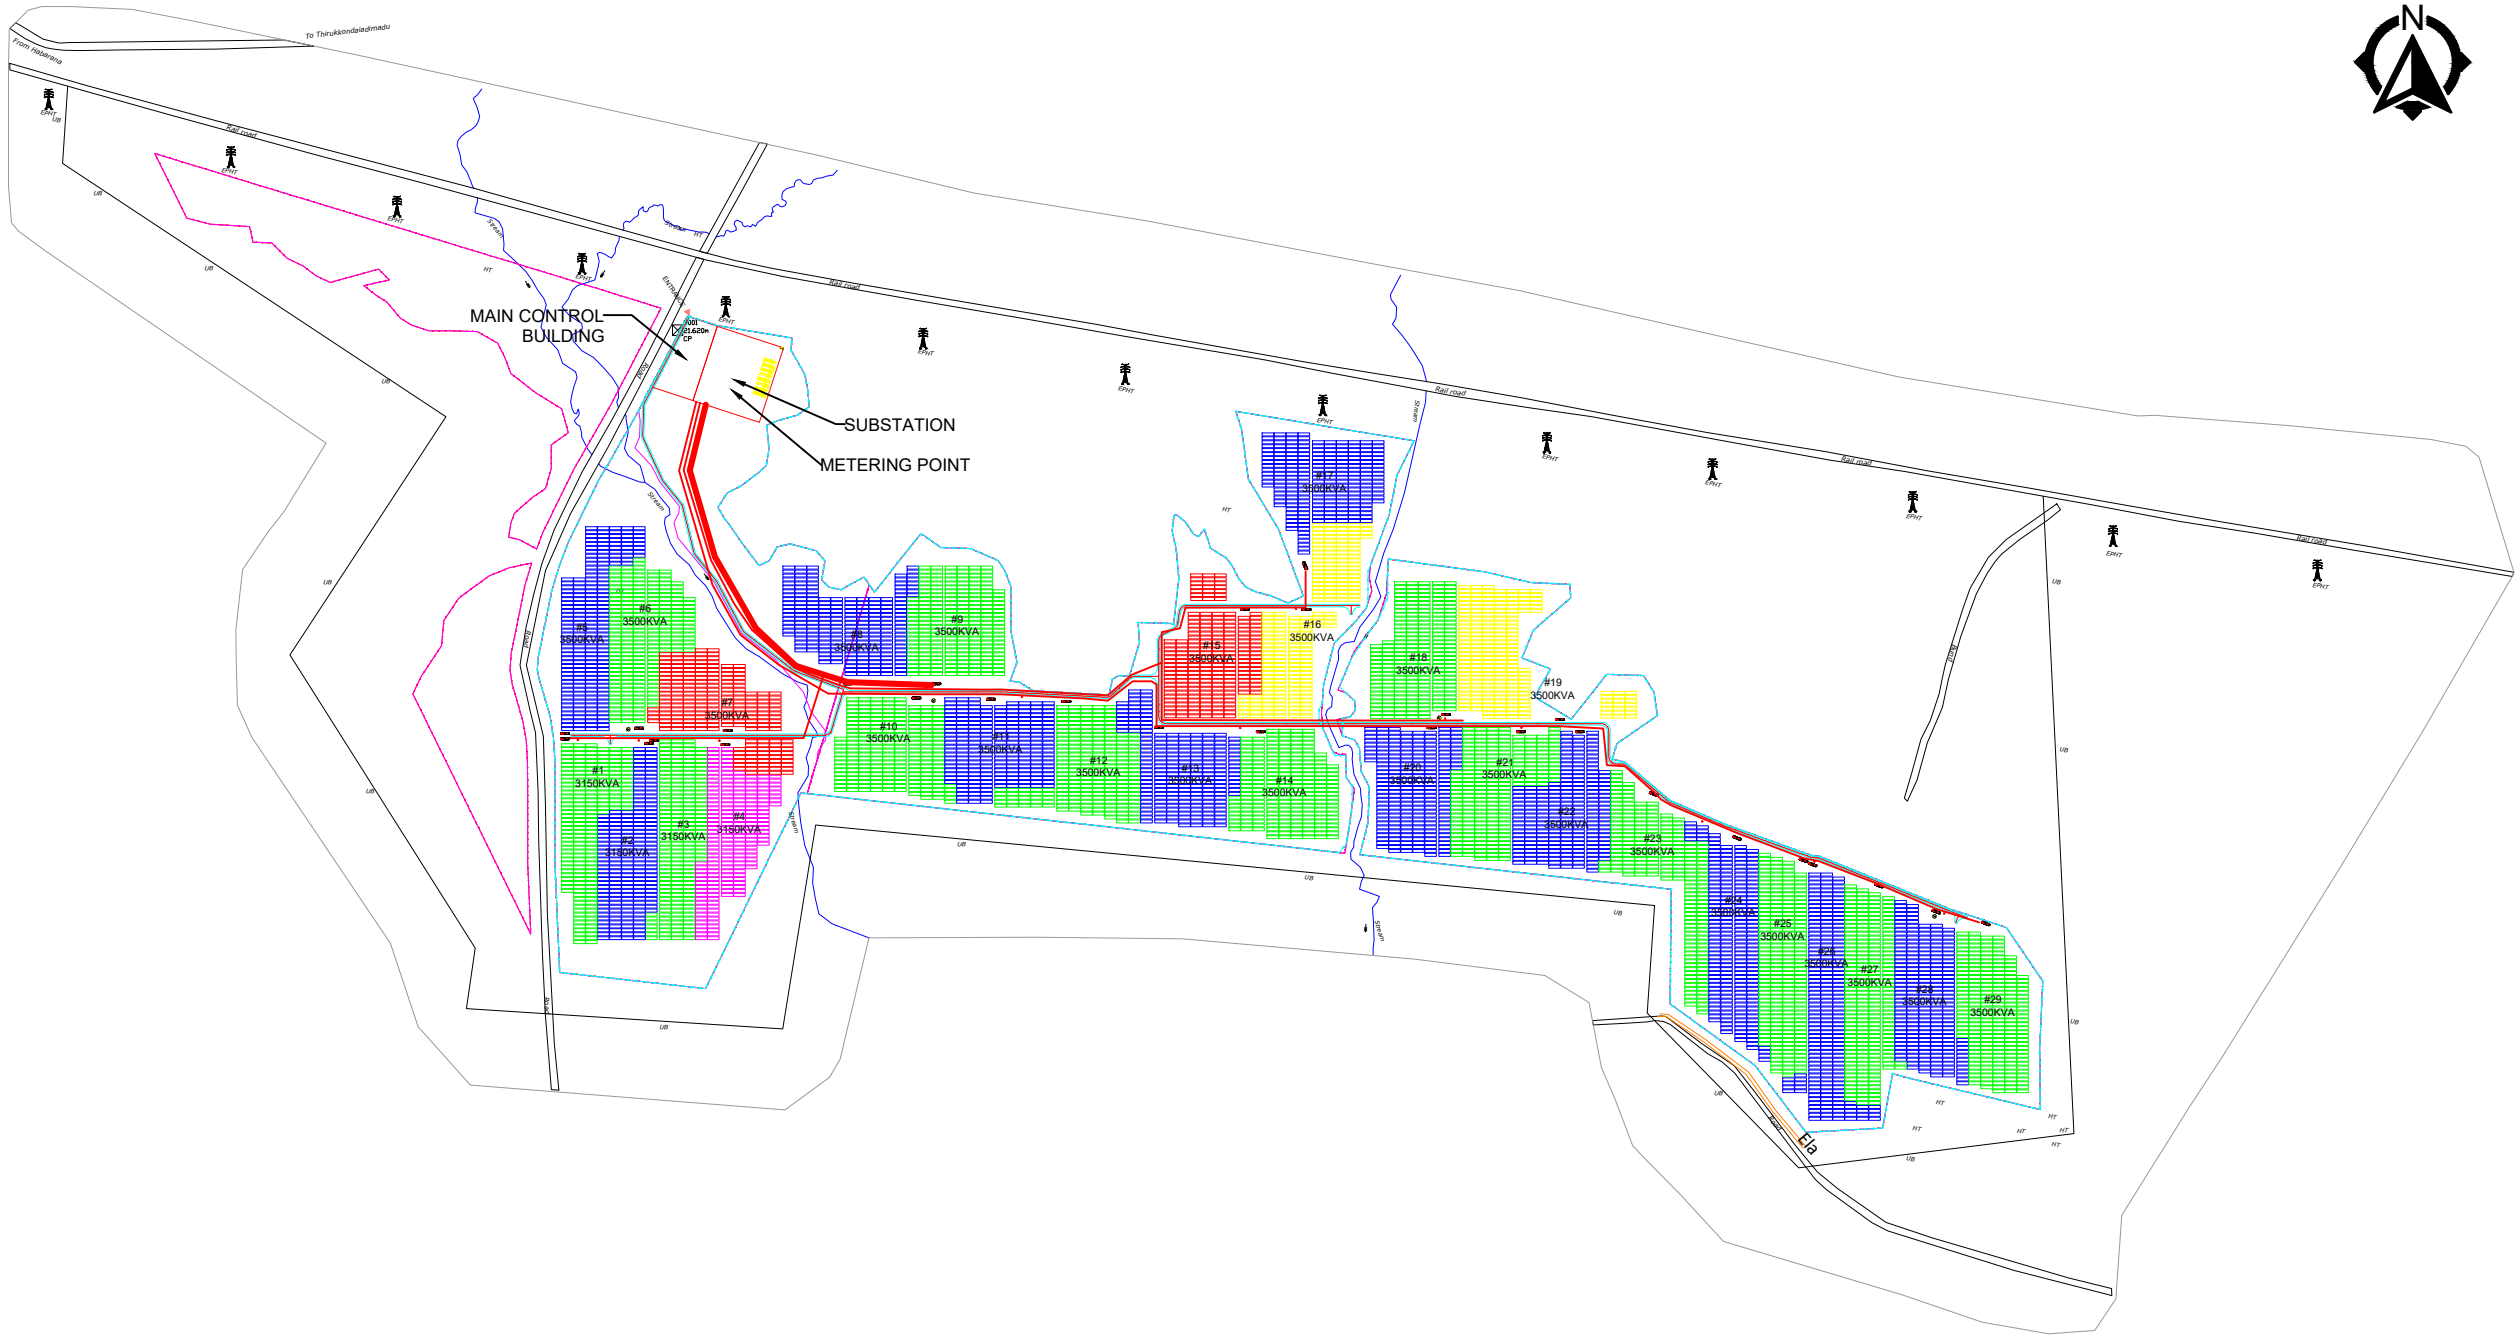

100 MW UTILITY SCALE PROJECT

CLIENT :

DRAFT BY :	M.MUNSIF
CHECKED BY :	
APPROVED BY:	
FINALIZED BY:	

DRAWING TITLE :
GD-Transformer Layout

DRAWING NO :
GD-TL-001

SITE ID :

SITE NO :

SCALE :		DATE :	
SN	DATE	MODIFICATION CONTENT	APPROVED BY

LEGEND

IRRIGATION CANAL	ROAD
PV SUPPORT	MESH FENCE
AREA BOUNDARY	GATE
ENTRANCE	WEATHER STATION
GUARD HOUSE	LIGHTNING PROTECTION ROD
TRANSFORMER	

LAND USE STATISTICS

NO.	ITEM	UNIT	AMOUNT	REMARK
1	TOTAL LAND AREA	M ²	1,253,652	
2	ROAD	KM	3.8	
3	FENCE	KM	10.1	
4	ENTRANCE (4M WIDTH MESH GATE)	SET	3	
5	GUARD HOUSE	SET	1	

SYSTEM INFORMATION


Moudle Mounting Structure Type	2x14 Fixed Tilt (South Facing)
System Voltage	DC 1400V, LV-AC 800V, MV 33kV
Inter Row Clearance	1.5m
Tilt Angle	7°
Azimuth Angel	0°
Modules in Series per Strings	28
Total No. of PV modules (710Wp)	168,168
Total No. of Inverters (350kW)	286
Total No. of Transformer (4200kVA)	25
Total No. of Transformer (3750kVA)	4
Plant DC Power	119.39 MW
Plant AC Power	100.10 MW
DC/AC Ratio	1.19

- EXPLANATION:
1. TOTAL OF TWENTY-NINE (29) AC POWER OUTPUT CLUSTERS, DESIGNATED #1 THROUGH #29.
 2. EACH CLUSTER IS SERVICED BY ONE (1) DEDICATED POWER TRANSFORMER.
 3. CLUSTERS #1 TO #4: EQUIPPED WITH 3750 KVA POWER TRANSFORMERS.
 4. CLUSTERS #5 TO #29: EQUIPPED WITH 4200 KVA POWER TRANSFORMERS.

FOR TRANSFORMER UNIT 1-4

100 MW UTILITY SCALE
PROJECT

CLIENT :

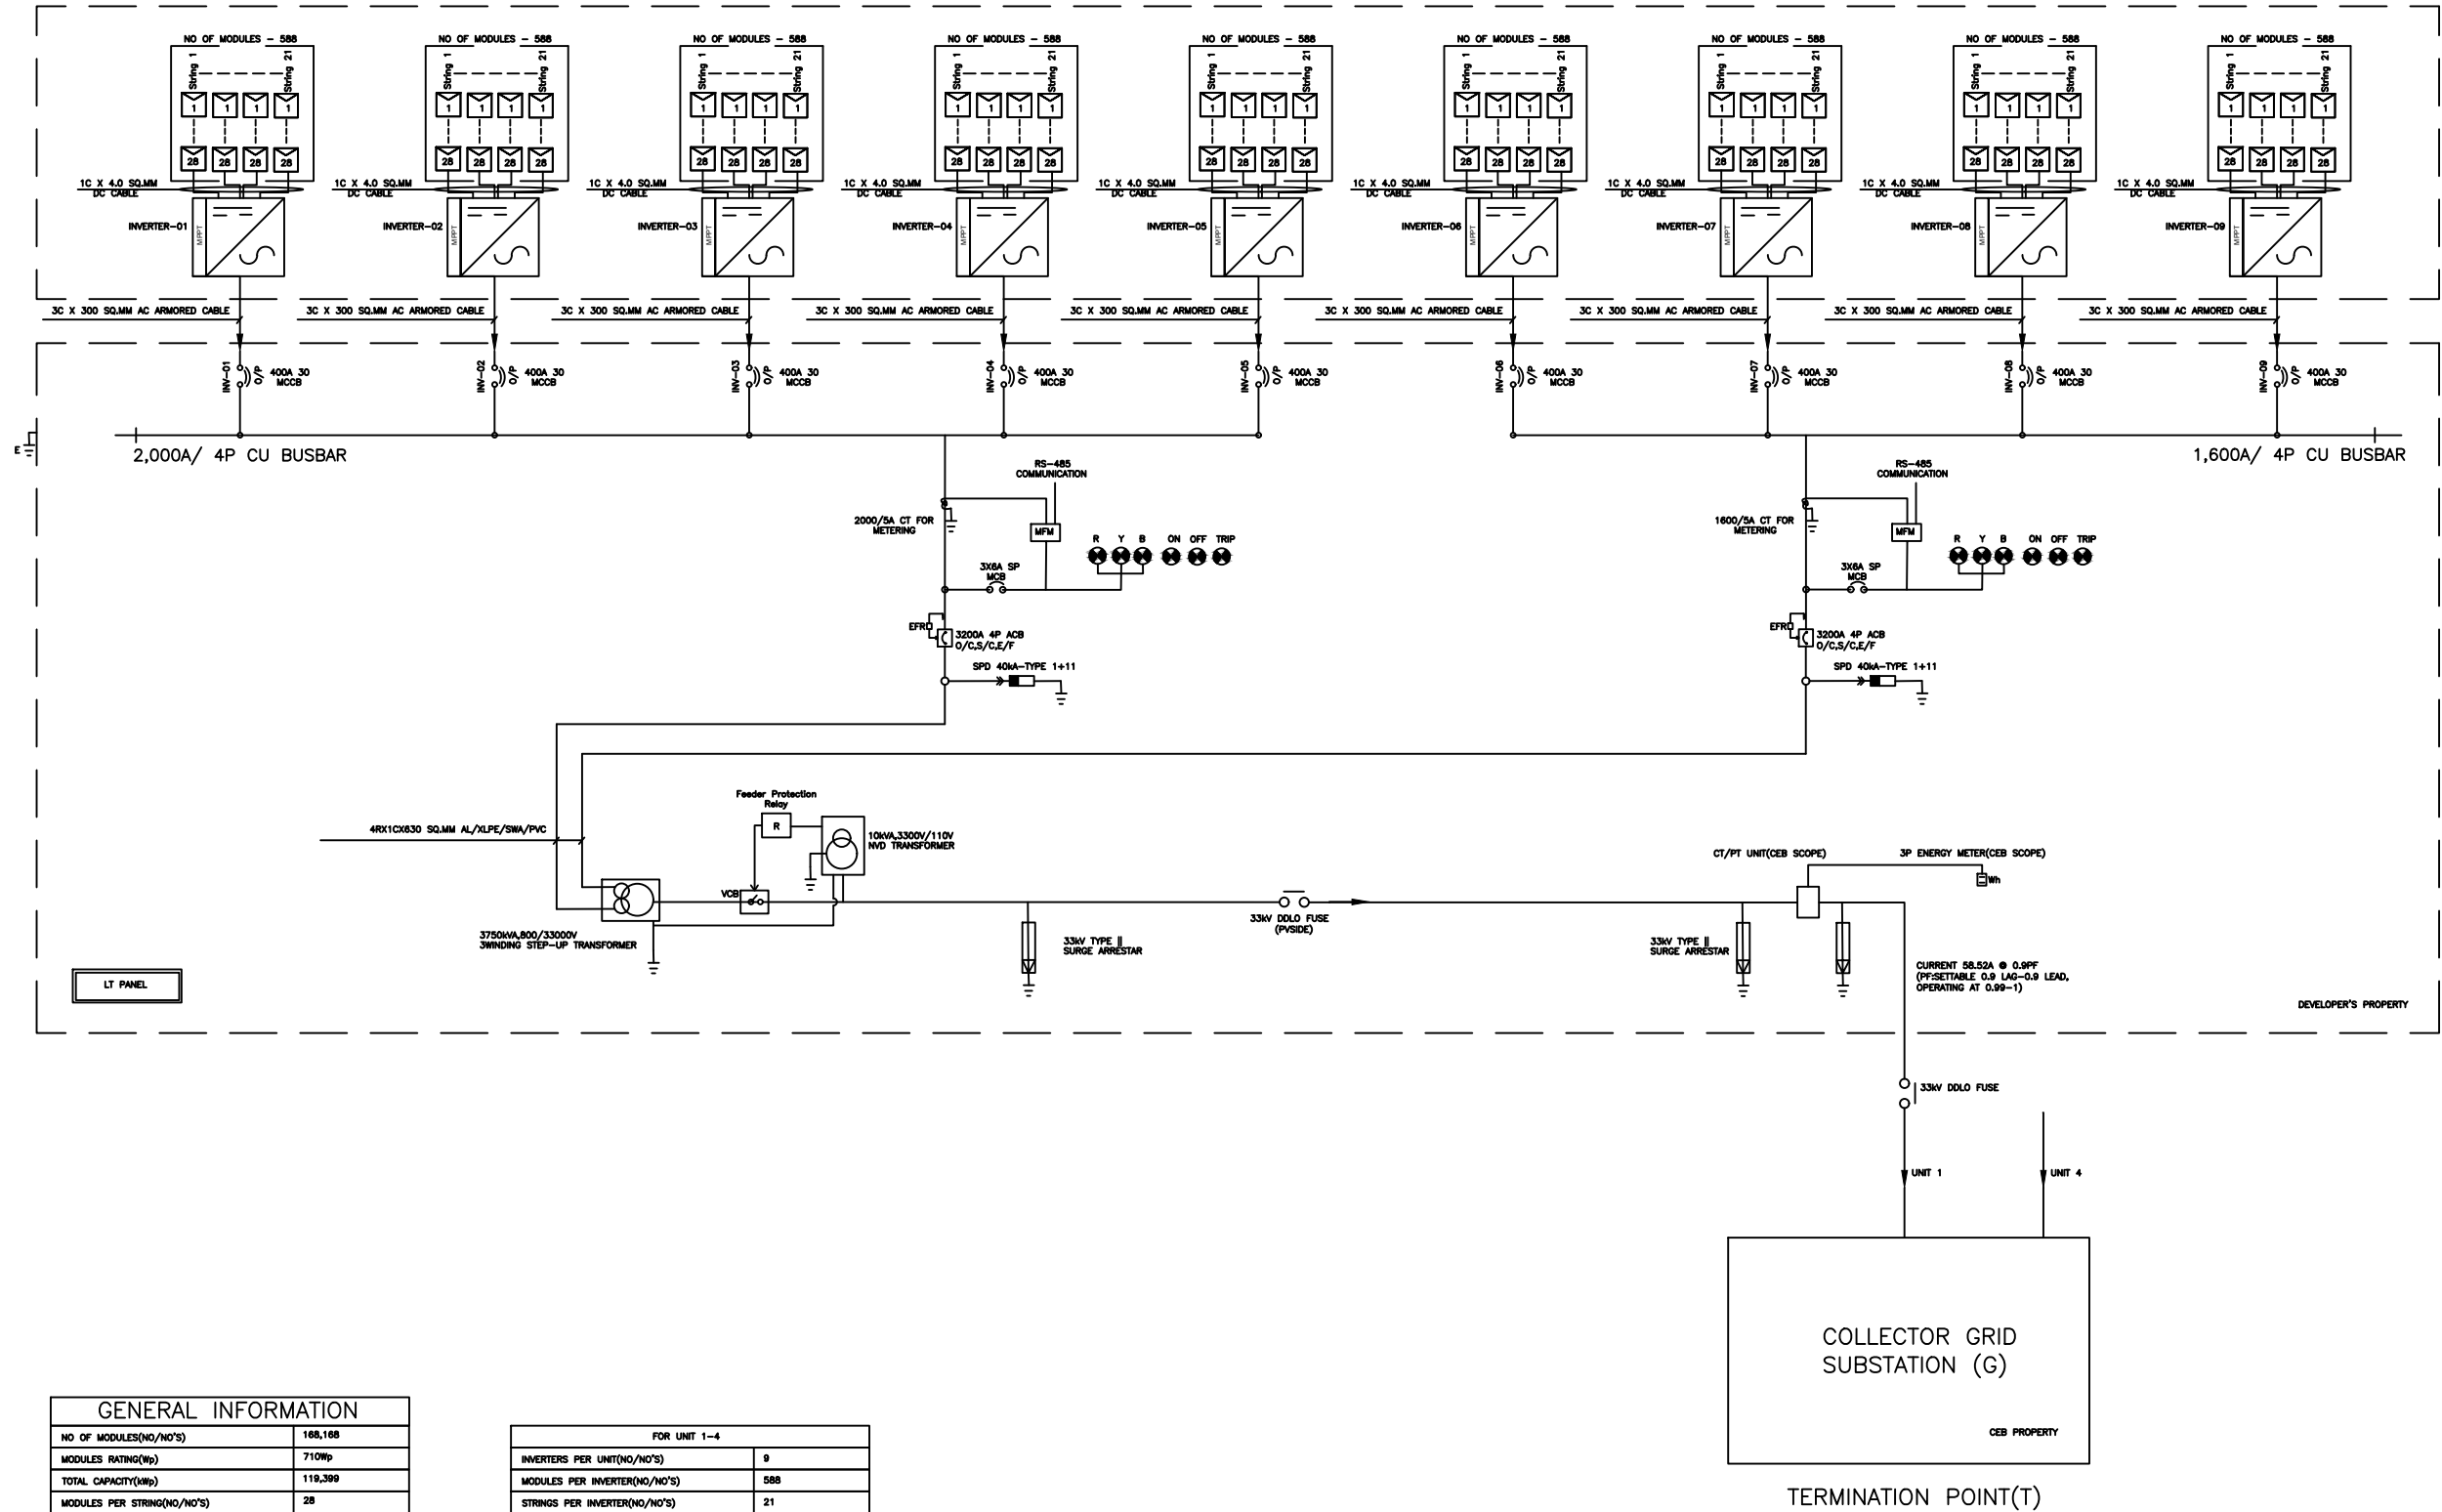

GENERAL INFORMATION

NO OF MODULES(NO/NO'S)	168,168
MODULES RATING(Wp)	710Wp
TOTAL CAPACITY(MWp)	119,399
MODULES PER STRING(NO/NO'S)	28
TOTAL OF STRINGS(NO/NO'S)	6006
NO OF INVERTERS/CAPACITY(MW)	286/350
TOTAL AREA COVERING(SQ.MTS)	544,054
MODULE TILT	7
HEIGHT OF THE STRUCTURE(mm)	1200

FOR UNIT 1-4

INVERTERS PER UNIT(NO/NO'S)	9
MODULES PER INVERTER(NO/NO'S)	588
STRINGS PER INVERTER(NO/NO'S)	21

DRAFT BY :	M.MUNSIF
CHECKED BY :	
APPROVED BY:	
FINALIZED BY:	

DRAWING TITLE :
GD-SINGLE LINE DIAGRAM

DRAWING NO :
GD-SLD-001

SITE ID :

SITE NO :

SCALE :

DATE :

SN	DATE	MODIFICATION CONTENT	APPROVED BY

100 MW UTILITY SCALE
PROJECT


DRAFT BY :	M.MUNSIF
CHECKED BY :	
APPROVED BY:	
FINALIZED BY:	

DRAWING NO :
GD-SLD-002

SITE NO :

DATE :

SN	DATE	MODIFICATION CONTENT	APPROVED BY



FOR UNIT 5-29	
INVERTERS PER UNIT(NO./NO'S)	10
MODULES PER INVERTER(NO./NO'S)	588
STRINGS PER INVERTER(NO./NO'S)	21

COLLECTOR GRID
SUBSTATION (G)

CEB PROPERTY

TERMINATION POINT(T)